




VGRCB-13PNEUF / VGFCB-13PNEUF

The VGRCB-13PNEUF provides up to 13 pneumatic lines to for individual air sources for interconnects utilizing pneumatic cylinders. Control of the airflow is designed to be on the test system side in this application, as these contacts do not start/stop the airflow through the contacts. Two precision alignment pins per block ensure proper alignment. Two shoulder mounting screws per block allow the block to float in the receiver. The block is sold fully loaded.

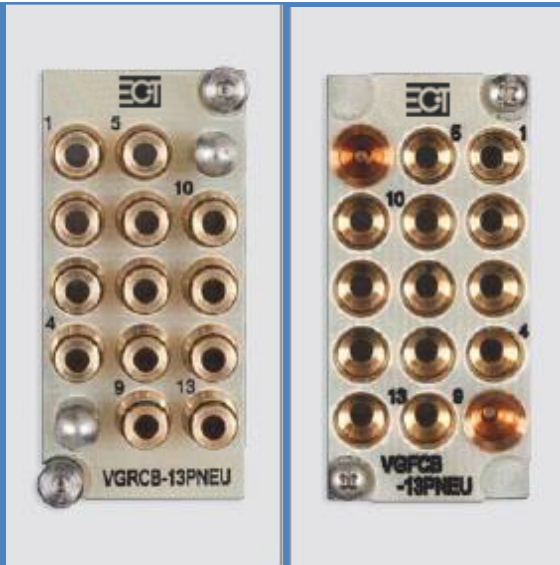

Pneumatic Contact Pair Specifications

Air Pressure Rating 120 psi @ 75 F
Durability 25,000 Cycles

Tubing Specifications

Polyamide Tubing Type PP-4
Inside Diameter 4mm

Ordering Information:

Receiver Module:

Receiver Module Contact VGRCB-13PNEUF Ref No (902) A32431
Receiver Module O-Ring A34432

Fixture Module:

Fixture Module Contact VGFCB-13PNEUF Ref No (903) A32432

For more information about VG Mass Interconnect products:
Contact your Local Sales Representative at www.ect-cpg.com/principal-offices
Visit ECT Online at www.ect-cpg.com/vg-mass-interconnect-products



A Coahu Company