




# VGRCB-22CPF / VGFCB-22CPF

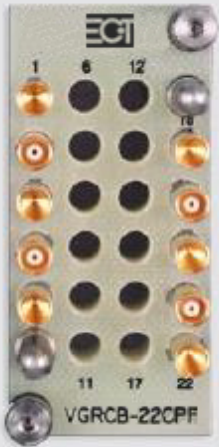

The VGRCB-22CPF provides 22 contacts for mini coax, mini-power or a combination of both contact styles. Coax contacts are provided for signals up to 1Ghz and power signals up to 50 Amps / 250VAC. Two precision alignment pins per block ensure proper alignment. Two shoulder mounting screws per VGR block allow the block to float in the receiver. Contacts, blocks and cables sold separately.

### Coax Contact Pair Specifications

Voltage	250VAC
Current	.5 Amps
Contact Resistance	5mΩ
Impedance	50Ω
Capacitance	21pf
Inductance	3nH
Bandwidth	1Ghz
Durability	25,000 Cycles
Coax Connection Type	Crimp

### Power Contact Pair Specifications

Power Contact (8AWG std)	50 Amps
--------------------------	---------

### Ordering Information:

Receiver Module:	VGRCB-22CPF Ref No (527)	Fixture Module:	VGFCB-22CPF Ref No (528)
36" Receiver Coax Cable Assy.	CR-MCA50RG174-36	36" Fixture Coax Cable Assy.	CF-MCA50RG174-36
Receiver Mini Coax Contact	CR-610104114	Fixture Mini Coax Contact	CF-610103115
Receiver Mini Power Contact	CR-610116112	Fixture Mini Power Contact	CF-0883011-02

### Accessories

Receiver / Fixture Contact Extraction Tool	VGMXT
--	-------

For more information about VG Mass Interconnect products:  
Contact your Local Sales Representative at [www.ect-cpg.com/principal-offices](http://www.ect-cpg.com/principal-offices)  
Visit ECT Online at [www.ect-cpg.com/vg-mass-interconnect-products](http://www.ect-cpg.com/vg-mass-interconnect-products)



A Cohu Company